

本公司保留更改产品设计与规格的权利，如有变更恕不另行通知。
如产品图片与实物有所区别，以实物为准。如有任何印刷错误，望广大用户谅解。



— Since 1995 —

山东亚和工程机械设备有限公司
SHANDONG YAHE CONSTRUCTION EQUIPMENT MACHINERY CO., LTD

地址：山东省滕州市荆河西路150号
国内销售部：13165213888
国际贸易部：15866237600
邮箱：dinglizg@163.com
网址：www.tzdingli.com

Address : No.150 West of Jinghe Road, Tengzhou city of Shandong
Province , China Contact: Gloria Liu
Domestic Sales Department:86-13165213888
International Trade Department:86-15866237600
Email: dinglizg@163.com
Website : www.tzdingli.com

YAHE
HEAVY INDUSTRY



亚和重工 与众不同
YAHE HEAVY
INDUSTRY IS DIFFERENT

山东亚和工程机械设备有限公司
SHANDONG YAHE CONSTRUCTION EQUIPMENT MACHINERY CO., LTD



COMPANY INTRODUCTION

公司简介

山东亚和工程机械设备有限公司是一家现代化的专业重型工程机械制造企业，山东地区代表性桩工机械企业。公司位于山东省南部，墨子故里—滕州，总投资8000万元人民币，占地面积15000平方米，建筑面积6000平方米，是一家集研发、设计、制造、销售各类旋挖钻机及其他工程机械的现代化企业。产品被广泛应用于公路、铁路、桥梁、水利、电力、机场、码头、港口、城乡建设及高层建筑等桩基础工程的钻孔灌注桩施工，赢得了广大用户的售誉和好评。

公司拥有自主进出口权，已通过ISO: 9001质量管理体系认证，并获得CE认证、SGS国际认证等全球权威机构的认可，在国内同行中先实现了批量出口南非、澳大利亚、俄罗斯、印度和非洲等三十多个国家，并与康明斯，力士乐，川崎等国际配件供应商建立了长期合作关系。我们的产品享有投资少、效率高、性价比高等美誉。作为中小型桩工机械行业排头兵，我们坚信唯有先进技术、可靠质量、完美服务才能把握住客户，在推动国内工民建桩基础施工升级的同时，全力提升品牌的知名度。


欢迎来中国参观我们的工厂，期待与您建立长期的业务关系。

Shandong Yake Construction Machinery Equipment Co., Ltd. is a modern professional manufacturer of heavy construction machinery. Representative piling machinery enterprise in Shandong. The company is located in Tengzhou, the hometown of Mozi in southern Shandong Province, with a total investment of 80 million yuan, covering an area of 15,000 square meters and a building area of 6,000 square meters. It is a company that integrates R&D, design, manufacturing, and sales of various rotary drilling rigs and other A modern enterprise of construction machinery. The products are widely used in the construction of bored piles for pile foundation projects such as highways, railways, bridges, water conservancy, electric power, airports, wharves, ports, urban and rural construction and high-rise buildings, and won the users trust and praise!

The company has independent import and export rights, has passed ISO: 9001 quality management system certification, and has been recognized by global authorities such as CE certification and SGS international certification. Among domestic counterparts, it has achieved bulk export to South Africa, Australia, Russia, India and Africa. Waiting for more than 30 countries.

And it has established long-term cooperative relations with Cummins, Rexroth, Kawasaki and other international parts suppliers. Our products enjoy the reputation of low investment, high efficiency and high cost performance. As a pioneer in the small and medium-sized piling machinery industry, we firmly believe that only advanced technology, reliable quality, and perfect service can hold customers. While promoting the upgrading of domestic industrial and civilian construction of pile foundations, we will make every effort to enhance the brand's reputation.

Welcome to visit our factory in China and look forward to establishing long-term business relationship with you.

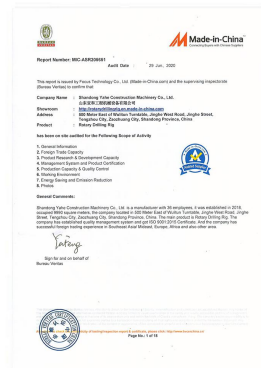



DR-100机锁杆旋挖钻机

DR-100 SERIES PILE DRIVER

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery Co., Ltd



YAHE
HEAVY INDUSTRY

专业的技术核心 精密的加工制造
LAYOUT OF THE ARTICLE
细节成就品质



打造高质的产品，发展精英的团队
CREATE HIGH QUALITY PRODUCTS AND DEVELOP ELITE TEAMS

精益求精：铸造品质，优质服务，缔造未来。我们竭诚为您服务，为您提供可靠的产品与服务

DETAIL
QUALITY



DR-120 机锁杆旋挖钻机

DR-120 SERIES PILE DRIVER

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery CO., Ltd

YAHE
HEAVY INDUSTRY

亚和重工 与众不同
YAHE HEAVY INDUSTRY OUT OF THE ORDINARY
产品始终如一

CREATE
FUTURE



产品始终如一 是我们永恒的目标
PRODUCT CONSISTENCY IS OUR ETERNAL GOAL

亚和重工将为客户提供热情的服务，优质的产品，优惠的价格，完善的售后服务。确保客户满意是我们的承诺，也是我们不懈的追求。



DR-150 机锁杆旋挖钻机

DR-150 SERIES PILE DRIVER

山东亚和工程机械设备有限公司
Shandong YAHE Construction Equipment Machinery CO., Ltd

QUALITY

CASTING



一言九鼎 力拔山河
ONE WORD AND NINE
品质铸造完美

YAHE
HEAVY INDUSTRY

实力的象征 信誉的载体
SYMBOL OF STRENGTH AND REPUTATION CARRIER
强而有力的质量保证 全天候技术服务支持
完善的售后服务体系 迅速及时的现场维修



DR-160 机锁杆旋挖钻机

DR-160 SERIES PILE DRIVER

良好的稳定性和抗侧翻能力
GOOD STABILITY AND ANTI-ROLLOVER ABILITY
科技缔造完美品质

追求品质卓越 尽显企业精华

PURSUE QUALITY EXCELLENCE AND SHOW
THE ESSENCE OF ENTERPRISE

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery Co., Ltd



YAHE
HEAVY INDUSTRY

A WORD

JIUDING



DR-180 机锁杆旋挖钻机

DR-180 WHEEL SERIES ROTARY DRILLING RIG

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery Co., Ltd

YAHE
HEAVY INDUSTRY



追求品质卓越 尽显企业精华
PURSUE QUALITY EXCELLENCE AND
SHOW THE ESSENCE OF ENTERPRISE

量身定做符合您需求的解决方案——争创桩机
行业经典品牌！



快慢随心 油我掌控
FAST AND SLOW, I CONTROL
科技缔造完美品质



PURSUE
EXCELLENCE



DF 方杆旋挖钻机系列

DF SERIES PILE DRIVER

全速响应 全程安心
FULL SPEED RESPONSE
品质改变世界

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery Co., Ltd



CHANGE
WORLD

YAHE
HEAVY INDUSTRY

以创新为发展之道 视质量为人魂之本

TAKING INNOVATION AS THE WAY OF DEVELOPMENT
AND QUALITY AS THE FOUNDATION OF HUMAN SOUL



360轮式旋挖钻机

360 WHEEL SERIES ROTARY DRILLING RIG

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery Co., Ltd.



科技创造未来 精品回报社会

SCIENCE AND TECHNOLOGY CREATE THE FUTURE,
QUALITY RETURNS TO SOCIETY

建设最具创新和服务精神的国际化机械制造企业
建设客户和员工信赖的机械制造企业

CREATE

FUTURE



旋挖钻机 ROTARY DRILLING RIG



液压打桩机 1.5T-10T
HYDRAULIC PILE DRIVER 1.5T-10T

追求品质卓越 尽显企业精华
PURSUE QUALITY EXCELLENCE AND
SHOW THE ESSENCE OF ENTERPRISE

公司积极调整企业的经营战略和方式，不断提高目标市场的占有率，以高效的经营机制、完善的销售网络和独特的服务理念构成公司强大的核心竞争力。



履带长螺旋 打桩机
TRACK LONG SPIRAL PILE DRIVER

山东亚和工程机械设备有限公司
Shandong Yahe Construction Equipment Machinery CO., Ltd

吊车 8T-20T
CRANE 8T-20T



挖机改装旋挖钻机
EXCAVATOR MODIFIED ROTARY DRILLING RIG



CREATE
FUTURE



柴油锤打桩机
DIESEL HAMMER PILE DRIVER





履带式锁杆旋挖钻机技术参数

Crawler -type Lock Rod Rotary Drilling Rig technical parameters

型 号	DR-90	DR-100	DR-120	DR-150
底盘长度 (mm)	3400	3700	4200	4200
履带宽度 (mm)	500	600	600	600
整机重量 (t)	15-19	22-24	26	30
最大钻孔深度 (m)	15	20	30	30
钻孔直径 (mm)	450-1500	450-1600	500-1600	500-1800
发动机品牌	玉柴/潍柴/康明斯 (可选配)			
发动机额定功率 (KW/rpm)	110KW	110KW-151KW	126KW-151KW	151KW-176KW
动力头最大扭矩 (KN.m)	90	100	120	150
动力头转速 (rpm)	10-40	10-50	10-50	10-50
液压系统最大工作压力主泵 (MPa)	30	30	30	30
液压系统最大工作压力副泵 (MPa)	12	12	12	12
液压系统最大流量主泵 (L/min)	63*2 (可选)	63*2 (可选)	80*2 (可选)	112*2 (可选)
液压系统最大流量副泵 (L/min)	16	16	16	16
加压系统最大加压力 (KN)	100	100	100	100
加压系统最大提升力 (KN)	80	80	80	80
加压系统最大行程 (mm)	2000	3000	3000	3000
主卷扬最大提升力 (KN)	120	120	150	150
主卷扬最大提升速度 (m/min)	50	50	50	50
副卷扬最大提升力 (KN)	15	15	15	15
副卷扬最大提升速度 (m/min)	50	50	50	50
钻桅左右倾角 (°)	±5	±5	±5	±5
钻桅前倾角 (°)	5/90	5/90	5/90	5/90
底盘最大行走速度 (KM/h)	1.5	1.5	1.5	1.5
底盘最大爬坡度 (°)	25	25	25	25
行走最大扭矩 (N.m)	17000-40000	40000	40000-45000	45000
工作状态宽度 (mm)	2400	2600	2800	4200
运输状态长度 (mm)	9500	11500	11500	13000
运输状态宽度 (mm)	2400	2600	2800	2800
运输状态高度 (mm)	3250	3350	3400	3500
钻杆类型	机锁杆			
钻杆是否可定制	是			
钻具	可选500-1500mm钻头、 筒钻、取芯钻等	可选500-1600mm钻头、 筒钻、取芯钻等	可选500-1800mm钻头、 筒钻、取芯钻等	可选500-2000mm钻头、 筒钻、取芯钻等

Product Type	DR-90	DR-100	DR-120	DR-150
Chassis length (mm)	3400	3700	4200	4200
Track width (mm)	500	600	600	600
Machine weight (t)	15-19	22-24	26	30
Maximum drilling depth (m)	15	20	30	30
Drilling diameter (mm)	450-1500	450-1600	500-1600	500-1800
Engine brand	YUCHAI/WEICHAI/Cummins (Optional)			
Engine rated power (KW/rpm)	110KW	110KW-151KW	126KW-151KW	151KW-176KW
Maximum torque of power head (KN.m)	90	100	120	150
Power head speed (rpm)	10-40	10-50	10-50	10-50
Max Main Pump Pressure of Hydraulic System (MPa)	30	30	30	30
Max Auxiliary Pump Pressure of Hydraulic System (MPa)	12	12	12	12
Max Flow Rate of Main Pump Hydraulic System (L/min)	63*2 (Optional)	63*2 (Optional)	80*2 (Optional)	112*2 (Optional)
Hydraulic system maximum flow auxiliary pump (L/min)	16	16	16	16
Maximum Pressure of Pressure System (KN)	100	100	100	100
Maximum Lifting Force of Pressure System (KN)	80	80	80	80
Maximum stroke of pressure system (mm)	2000	3000	3000	3000
Maximum lifting force of main hoist (KN)	120	120	150	150
The maximum speed of the hoist is (m/min)	50	50	50	50
Maximum lifting force of the auxiliary winch (KN)	15	15	15	15
Maximum hoisting speed of sub-hoist (m/min)	50	50	50	50
Sidewards inclination (°)	±5	±5	±5	±5
Pitch angle (°)	5/90	5/90	5/90	5/90
Maximum travel speed of chassis (KM/h)	1.5	1.5	1.5	1.5
Maximum creep degree of chassis (°)	25	25	25	25
Maximum travel torque (N.m)	17000-40000	40000	40000-45000	45000
Working state width (mm)	2400	2600	2800	4200
Transport status length (mm)	9500	11500	11500	13000
Transport status width (mm)	2400	2600	2800	2800
Transport status height (mm)	3250	3350	3400	3500
Type of Drill Pipe	Machine Lock			
Customized of Drilling Pipe	YES			
drilling tool	Optional for 500-1500	Optional for 500-1600	Optional for 500-1800	Optional for 500-2000
	Drill Head, Core, etc.	Drill Head, Core, etc.	Drill Head, Core, etc.	Drill Head, Core, etc.



履带式锁杆旋挖钻机技术参数

Crawler -type Lock Rod Rotary Drilling Rig technical parameters

型 号	DR-160	DR-180	DR-220	DR-285
底盘长度 (mm)	4800	5200	5800	6500
履带宽度 (mm)	600	700	700	800
整机重量 (t)	35	46	55	70
最大钻孔深度 (m)	40	45	46-60	60-80
钻孔直径 (mm)	500-1800	600-2000	600-2200	600-2400
发动机品牌	潍 柴 / 康 明 斯 (可 选 配)			
发动机额定功率 (KW/rpm)	158KW-176KW	176KW-194KW	194KW-220KW	220KW-300KW
动力头最大扭矩 (KN.m)	160	180	220	285
动力头转速 (rpm)	10-50	10-40	7-27	5-30
液压系统最大工作压力主泵 (MPa)	30	30	30	30
液压系统最大工作压力副泵 (MPa)	12	20	28	34.3
液压系统最大流量主泵 (L/min)	112*2 (可选)	112*2	126*2	140*2
液压系统最大流量副泵 (L/min)	16	16	16	16
加压系统最大加压力 (KN)	100	160	180	240
加压系统最大提升力 (KN)	80	140	160	200
加压系统最大行程 (mm)	3000	4000	5000	5000
主卷扬最大提升力 (KN)	150	200	260	300
主卷扬最大提升速度 (m/min)	50	50	55	60
副卷扬最大提升力 (KN)	15	50	80	90
副卷扬最大提升速度 (m/min)	50	70	70	70
钻桅左右倾角 (°)	±5	±5	±5	±5
钻桅前倾角 (°)	5/90	5/90	5/90	5/90
底盘最大行走速度 (KM/h)	1.5	1.5	1.5	1.5
底盘最大爬坡度 (°)	25	30	30	30
行走最大扭矩 (N.m)	45000	61000	80000	11000
工作状态宽度 (mm)	4200	4200	4400	45000
运输状态长度 (mm)	13000	12000	13500	15500
运输状态宽度 (mm)	2800	3000	3200	3300
运输状态高度 (mm)	3550	3550	3600	3610
钻杆类型	机锁杆	机锁杆/摩阻	机锁杆/摩阻	机锁杆/摩阻
钻杆是否可定制	是	是	是	是
钻具	可选500-3000mm钻头、 筒钻、取芯钻等	可选600-3000mm钻头、 筒钻、取芯钻等	可选600-3000mm钻头、 筒钻、取芯钻等	可选600-3000mm钻头、 筒钻、取芯钻等

Product Type	DR-160	DR-180	DR-220	DR-285
Chassis length (mm)	4800	5200	5800	6500
Track width (mm)	600	700	700	800
Machine weight (t)	35	46	55	70
Maximum drilling depth (m)	40	45	46-60	60-80
Drilling diameter (mm)	500-1800	600-2000	600-2200	600-2400
Engine brand	WEICHAI/Cummins(Optional)			
Engine rated power (KW/rpm)	158KW-176KW	176KW-194KW	194KW-220KW	220KW-300KW
Maximum torque of power head (KN.m)	160	180	220	285
Power head speed (rpm)	10-50	10-40	7-27	5-30
Max Main Pump Pressure of Hydraulic System (MPa)	30	30	30	30
Max Auxiliary Pump Pressure of Hydraulic System (MPa)	12	20	28	34.3
Max Flow Rate of Main Pump Hydraulic System (L/min)	112*2 (Optional)	112*2	126*2	140*2
Hydraulic system maximum flow auxiliary pump (L/min)	16	16	16	16
Maximum Pressure of Pressure System (KN)	100	160	180	240
Maximum Lifting Force of Pressure System (KN)	80	140	160	200
Maximum stroke of pressure system (mm)	3000	4000	5000	5000
Maximum lifting force of main hoist (KN)	150	200	260	300
The maximum speed of the hoist is (m/min)	50	50	55	60
Maximum lifting force of the auxiliary winch (KN)	15	50	80	90
Maximum hoisting speed of sub-hoist (m/min)	50	70	70	70
Sidewards inclination (°)	±5	±5	±5	±5
Pitch angle (°)	5/90	5/90	5/90	5/90
Maximum travel speed of chassis (KM/h)	1.5	1.5	1.5	1.5
Maximum creep degree of chassis (°)	25	30	30	30
Maximum travel torque (N.m)	45000	61000	80000	110000
Working state width (mm)	4200	4200	4400	4500
Transport status length (mm)	13000	12000	13500	15500
Transport status width (mm)	2800	3000	3200	3300
Transport status height (mm)	3550	3550	3600	3610
Type of Drill Pipe	Machine Lock			
Customized of Drilling Pipe	YES			
drilling tool	Optional for 500-3000	Optional for 600-3000	Optional for 500-1800	Optional for 600-3000
	Drill Head, Core, etc.	Drill Head, Core, etc.	Drill Head, Core, etc.	Drill Head, Core, etc.



履带式机锁杆旋挖钻机技术参数

PARAMETERS OF CRAWLER LOCK ROTARY DRILLING RIG

型 号	DR-180	DR-220	DR-285
底盘长度 (mm)	5200	5800	6500
履带宽度 (mm)	700	700	800
整机重量 (t)	46	55	70
最大钻孔深度 (m)	45	46-60	60-80
钻孔直径 (mm)	600-2000	600-2200	600-2400
发动机品牌	潍柴/康明斯(可选配)	潍柴/康明斯(可选配)	潍柴/康明斯(可选配)
发动机额定功率 (KW/rpm)	176KW-194KW	194KW-220KW	220KW-300KW
动力头最大扭矩 (KN.m)	180	220	285
动力头转速 (rpm)	10-40	7-27	5-30
液压系统最大工作压力主泵 (MPa)	30	30	30
液压系统最大工作压力副泵 (MPa)	20	28	34.3
液压系统最大流量主泵 (L/min)	112*2	126*2	140*2
液压系统最大流量副泵 (L/min)	16	16	16
加压系统最大压力 (KN)	160	180	240
加压系统最大提升力 (KN)	140	160	200
加压系统最大行程 (mm)	4000	5000	5000
主卷扬最大提升力 (KN)	200	260	300
主卷扬最大提升速度 (m/min)	50	55	60
副卷扬最大提升力 (KN)	50	80	90
副卷扬最大提升速度 (m/min)	70	70	70
钻桅左右倾角 (°)	±5	±5	±5
钻桅前倾角 (°)	5/90	5/90	5/90
底盘最大行走速度 (KM/h)	1.5	1.5	1.5
底盘最大爬坡度 (°)	30	30	30
行走最大扭矩 (N.m)	61000	80000	110000
工作状态宽度 (mm)	4200	4400	4500
运输状态长度 (mm)	12000	13500	15500
运输状态宽度 (mm)	3000	3200	3300
运输状态高度 (mm)	3550	3600	3610
钻杆类型	机锁杆/摩阻	机锁杆/摩阻	机锁杆/摩阻
钻杆是否可定制	是	是	是
钻头	可选600-3000mm钻头 筒钻、取芯钻等	可选600-3000mm钻头 筒钻、取芯钻等	可选600-3000mm钻头 筒钻、取芯钻等

仅供参考,请以实际产品为准。



履带式机锁杆旋挖钻机技术参数

PARAMETERS OF CRAWLER LOCK ROTARY DRILLING RIG

NAME	DR-180	DR-220	DR-285
Chassis length (mm)	5200	5800	6500
Track width (mm)	700	700	800
Machine weight (t)	46	55	70
Maximum drilling depth (m)	45	46-60	60-80
Drilling diameter (mm)	600-2000	600-2200	600-2400
Engine brand	WEICHAI/Cummins(Optional)	WEICHAI/Cummins(Optional)	WEICHAI/Cummins(Optional)
Engine rated power (KW/rpm)	176KW-194KW	194KW-220KW	220KW-300KW
Maximum torque of power head (KN.m)	180	220	285
Power head speed (rpm)	10-40	7-27	5-30
Max Main Pump Pressure of Hydraulic System (MPa)	30	30	30
Max Auxiliary Pump Pressure of Hydraulic System (MPa)	20	28	34.3
Max Flow Rate of Main Pump Hydraulic System (L/min)	112*2	126*2	140*2
Hydraulic system maximum flow auxiliary pump (L/min)	16	16	16
Maximum Pressure of Pressure System (KN)	160	180	240
Maximum Lifting Force of Pressure System (KN)	140	160	200
Maximum stroke of pressure system (mm)	4000	5000	5000
Maximum lifting force of main hoist (KN)	200	260	300
The maximum speed of the hoist is (m/min)	50	55	60
Maximum lifting force of the auxiliary winch (KN)	50	80	90
Maximum hoisting speed of sub-hoist(m/min)	70	70	70
Left and right inclination angle of drilling mast	±5	±5	±5
Forward inclination angle of drilling mast(°)	5/90	5/90	5/90
Maximum travel speed of chassis (KM/h)	1.5	1.5	1.5
Maximum creep degree of chassis°	30	30	30
Maximum travel torque (N.m)	61000	80000	110000
Working state width (mm)	4200	4400	4500
Length of transport status (mm)	12000	13500	15500
Transport status width (mm)	3000	3200	3300
Transport status height (mm)	3550	3600	3610
Drill rod type	Lock/Friction resistance	Lock/Friction resistance	Lock/Friction resistance
Customized of Drilling Pipe	YES	YES	YES
Drill tools	Optional 600-3000mm drill, drill, core drill,expanding drill...	Optional 600-3000mm drill, drill, core drill,expanding drill...	Optional 600-3000mm drill, drill, core drill,expanding drill...

For reference only, please refer to the actual product.



履带式方杆旋转钻机 技术参数

PARAMETERS OF CATERPILLAR-TYPE SQUARE ROD ROTARY DRILLING RIG

型 号	NAME	
底盘长度 (mm)	Chassis length (mm)	3700-3900
履带宽度 (mm)	Track width (mm)	450-600
整机重量 (t)	Machine weight (t)	13-16
最大钻孔深度 (m)	Maximum drilling depth (m)	15-20
钻孔直径 (mm)	Drilling diameter (mm)	500-1500
发动机品牌	Engine brand	玉柴/潍柴/康明斯 (可选配) YUCHAI/WEICHAI/Cummins(Optional)
发动机额定功率 (KW/rpm)	Engine rated power (KW/rpm)	85KW-151KW
动力头最大扭矩 (N.m)	Maximum torque of power head (N.m)	24000-30000
动力头转速 (rpm)	Power head speed (rpm)	10-30
动力头是否可定制	Power head can be customized	是 / YES
液压系统最大工作压力主泵 (Mpa)	Max Main Pump Pressure of Hydraulic System (Mpa)	25-30
液压系统最大工作压力副泵 (Mpa)	Max Auxiliary Pump Pressure of Hydraulic System (Mpa)	12
液压系统最大流量主泵 (L/min)	Max Flow Rate of Main Pump Hydraulic System (L/min)	50*2
液压系统最大流量副泵 (L/min)	Hydraulic system maximum flow auxiliary pump (L/min)	16
加压系统最大压力 (KN)	Maximum Pressure of Pressure System (KN)	100
加压系统最大提升力 (KN)	Maximum Lifting Force of Pressure System (KN)	100
加压系统最大行程 (m)	Maximum stroke of pressure system (m)	20
主卷扬最大提升力 (KN)	Maximum lifting force of main hoist (KN)	80
主卷扬最大提升速度 (m/min)	The maximum speed of the hoist is (m/min)	80
副卷扬最大提升力 (KN)	Maximum lifting force of the auxiliary winch (KN)	15
副卷扬最大提升速度 (m/min)	Maximum hoisting speed of sub-hoist (m/min)	50
副卷扬最大提升动力 (t)	Maximum lifting power of the auxiliary winch (t)	1.5
钻桅左右倾角 (°)	Left and right inclination angle of drilling mast (°)	±5
钻桅前倾角 (°)	Forward inclination angle of drilling mast (°)	4
底盘最大行走速度 (KM/h)	Maximum travel speed of chassis (KM/h)	2
底盘最大爬坡度 (°)	Maximum creep degree of chassis (°)	25
工作状态宽度 (mm)	Working state width (mm)	2400
运输状态长度 (mm)	Length of transport status (mm)	10200
运输状态宽度 (mm)	Transport status width (mm)	2400
运输状态高度 (mm)	Transport status height (mm)	2900
钻杆类型	Drill rod type	方杆、加压 / Square rod, pressurized type
钻杆是否可定制	Customized of Drilling Pipe	是 / YES
钻具	Drill tools	可选500-1500mm钻头、磨钻、取芯钻、扩孔钻等 500-1500mm drilling bit, Drilling Barrel, Coring drill, Reaming drilling bit

仅供参考, 请以实际产品为准。
For reference only, please refer to the actual product.



轮式旋挖钻机 技术参数

PARAMETERS OF WHEELED 360° ROTARY DRILLING RIG

型 号	NAME	
底盘长度 (mm)	Chassis length (mm)	4700
轮胎	Tire	825-16
整机重量 (t)	Machine weight (t)	10-13
钻孔深度 (m)	Maximum drilling depth (m)	10-30 (Optional/可选配)
钻孔直径 (mm)	Drilling diameter (mm)	500-1500
发动机品牌	Engine brand	潍柴 / WEICHAI
发动机型号	Engine Model	4108/6105 (Optional/可选配)
发动机额定功率 (KW/rpm)	Engine rated power (KW/rpm)	85KW-126KW
驱动	Drive	四驱 / Four-wheel drive
行走驱动	Travel drive	机械 / Mechanical
动力头最大扭矩 (N.m)	Maximum Torque of Power Head	24000-30000
动力头转速 (rpm)	Power head speed (rpm)	10-30
动力头是否可定制	Power head can be customized	YES
液压系统最大工作压力主泵 (Mpa)	Max Main Pump Pressure of Hydraulic System (Mpa)	25
液压系统最大工作压力副泵 (Mpa)	Max Auxiliary Pump Pressure of Hydraulic System (Mpa)	12
液压系统最大流量主泵 (L/min)	Hydraulic system maximum flow auxiliary pump (L/min)	50*2
液压系统最大流量副泵 (L/min)	Hydraulic system maximum flow auxiliary pump (L/min)	16
加压系统最大压力 (KN)	Maximum Pressure of Pressure System (KN)	80
加压系统最大提升力 (KN)	Maximum Lifting Force of Pressure System (KN)	80
加压系统最大行程 (m)	Maximum stroke of pressure system (m)	20
主卷扬最大提升力 (KN)	Maximum lifting force of main hoist (KN)	80
主卷扬最大提升速度 (m/min)	The maximum speed of the hoist is (m/min)	80
副卷扬最大提升力 (KN)	Maximum lifting force of the auxiliary winch (KN)	15
副卷扬最大提升速度 (m/min)	Maximum hoisting speed of sub-hoist (m/min)	50
副卷扬最大提升动力 (t)	Maximum lifting power of the auxiliary winch (t)	1.5
钻桅左右倾角 (°)	Left and right inclination angle of drilling mast	±5
钻桅前倾角 (°)	Forward inclination angle of drilling mast (°)	4
最大行走速度 (KM/h)	Maximum travel speed of chassis (KM/h)	35
底盘最大爬坡度 (°)	Maximum creep degree of chassis°	30
工作状态宽度 (mm)	Working state width (mm)	4000
运输状态长度 (mm)	Length of transport status (mm)	10200
运输状态宽度 (mm)	Transport status width (mm)	2200
运输状态高度 (mm)	Transport status height (mm)	3000
钻杆类型	Drill rod type	方杆、加压/自压 square drill pipe/Compression/self-pressure
钻杆是否可定制	Customized of Drilling Pipe	是 / YES
钻具	Whether to provide custom	可选500-1500mm钻头、磨钻、取芯钻、扩孔钻等 500-1500mm drilling bit, Drilling Barrel, Coring drill, Reaming drilling bit
是否提供定制	Drill tools	是 / YES


仅供参考, 请以实际产品为准。
For reference only, please refer to the actual product.



亚和重工
YAHONG HEAVY INDUSTRY

全球客户和工程案例展示

GLOBAL PROJECTS SHOW AND GLOBAL CUSTOMER SHOW

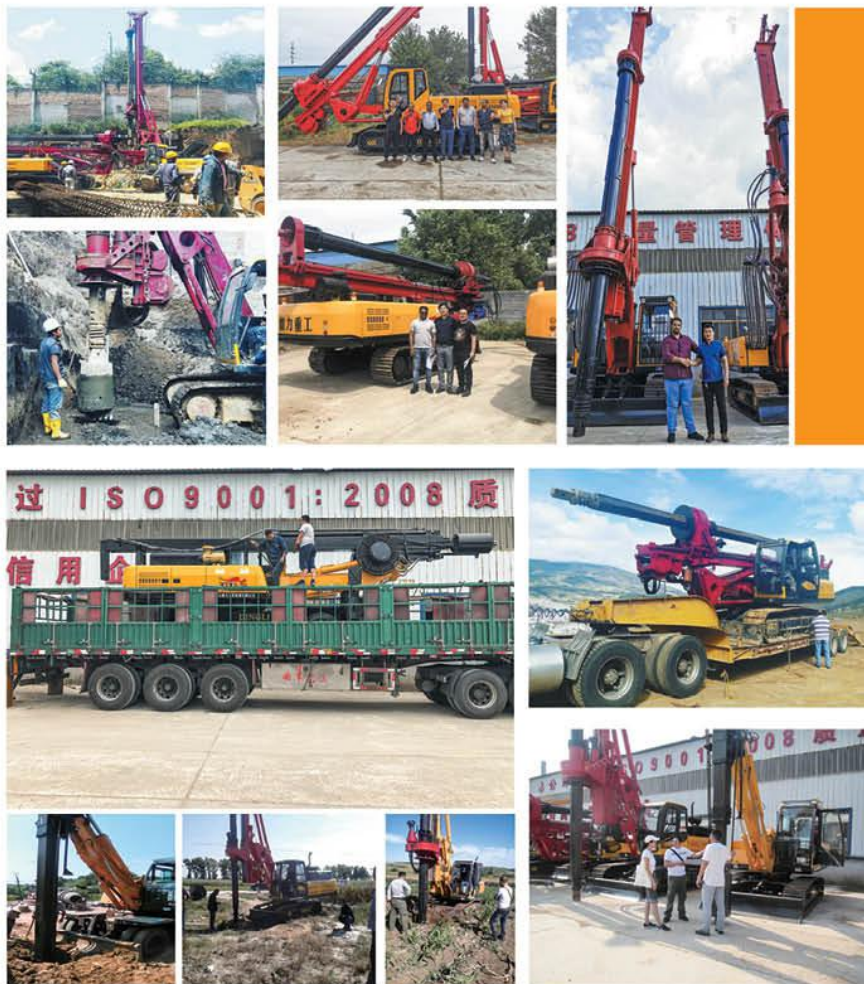

山东亚和工程机械设备有限公司
Shandong Yaha Construction Equipment Machinery Co., Ltd

