



MORLIGNE

MEDIKARE™

Your PPE and Medical solution

PPE AND MEDICAL MASKS SERIES



3 PLY MASK (MEDICAL GRADE)
CE/FDA Certified - BFE: 99%



3 PLY MASK (CHILDREN SIZE)
CE/FDA Certified - BFE: 99%



FFP2/N95 MASK
CE/FDA Certified - 5 Layers



FFP3 MASK
CE/FDA Certified - with valve



GLOVES SERIE



NITRILE GLOVES (POWER-FREE)

CE/FDA Certified - 100pcs/box



LATEX GLOVES

CE/FDA Certified - 100pcs/box



VINYL GLOVES

CE/FDA Certified - 100pcs/box



GOWN SERIES

Option available:

- Sterile / Non-Sterile
- Standard / Reinforced
- 25g / 35g / 42g
- SMS // SMMS



DISPOSABLE GOWN
(25g)

CE/FDA Certified



DISPOSABLE GOWN
(35g)

CE/FDA Certified



DISPOSABLE GOWN
(STERILE - 35g)

CE/FDA Certified



Knitted Cuff



Ultrasonic
sewing




Neck Tie




In Front
Pocket

CORONAVIRUS
2019-nCoV



SAFETY ADVICE

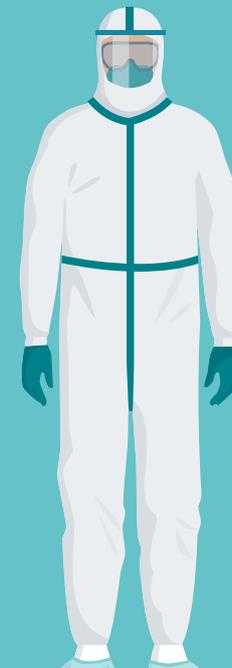

HAND WASH ALCOHOLIC GEL



HAND WASH ALCOHOLIC GEL (70% ALCOHOL)

CE/FDA Certified

- 100ml
- 250ml
- 500ml
- 1000ml



COOLER BOX (33L)

- Including 3 ice packs
- Quantities within 5 days: 1500 PCS
- Volume: 33Litters
- Quality: Premium ✓✓✓
- CE Certified: NA



Medicine Cooler KS-33

External size:

L570*W310*H370mm

Internal size:

L450*W225*H300mm

Capacity: 35L

Cooler weight: 4.5kg

Ice box: 3pcs CMB-1200

Maximum load: 18kg

Cooling time : 24-72h



MORLIGNE

COOLER BOX (54)

- Including 4 ice packs
- MOQ: 50 pcs
- Volume: 54Litters
- Quality: Premium ✓✓✓
- CE Certified: NA



Medicine Cooler **KS-54**

External size:
L615*W395*H420mm
Internal size:
L520*W300*H335mm
Capacity: 54L
Cooler weight: 8kg
Ice box: 4pcs CMB-1500
Maximum load: 60kg
Cooling time: 36h

FRIDGE. 2 TO 8 °C

- 3 Doors
- Volume: 1550 Liters
- MOQ: 50 PCS
- Quality: Standard ✓✓
- CE Certified ✓



MORLIGNÉ

Accurate temperature control system

Italy CAREL brand temperature control system, display accuracy of 0.1 °C , precise box temperature of 2 ~ 8 °C .

High-resolution temperature calibration function, proofreading in 0.1 °C increments . Intelligent control of fan strong refrigeration gas circulation .

Safe control system

Keyboard lock and password protection .

System failure alarm sound and point code display (high temperature /low temperature / sensor failure .Delayed start of self-check at start up and shutdown interval protection .

Sensor failure, digital disorder, safe and automatic running program .

Power-off memory function .

Refrigeration system

German SECOP brand high efficiency compressor . Imported Bi-Sonic fan, low temperature resistance and high humidity resistance .

Germany EBM brand cooling fan .

Germany DANFOSS brand filter system .

American DuPont brand refrigeration refrigerant .

Humanized design

High-quality steel wire dip adjustable shelf .

Outdoor anti-condensation technology .

Large screen digital display .

Safety door lock design .

Suitable for wide voltage band of 187-242V .

Transparent vacuum tempered glass door .

Energy-saving lighting in the cabinet .


Optional functions :

1. Temperature recorder. (USB) .

2. Temperature Printer .

3. SMS Remote Alarms system .

4. Alarms for (door open / power failure / low backup battery / low voltage) .

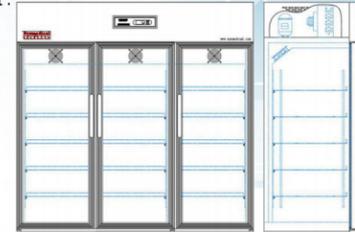

Model	Volume	Inner Temperature	Voltage	Power Consumption
YY-1550	1550 L	2~8 °C	~220V/50Hz	2.8 kWh /24h
Input Power	Electric Shock	Climate Type	Alarms Type	Optional Functions
450 W	I/B	N	Sound / Light	Recorder/Printer/SMS Alarms
Refrigerant	Net Weight	Chamber	Products Dimension (D*W*H)	Package Dimension (D*W*H)
R404a	220 KG	6	1800*720*1860 mm	1920*850*1980 mm

FRIDGE. 2 TO 8 °C

- 3 Doors
- Volume: 1200 Liters
- MOQ: 50 PCS
- Quality: Entry Level ✓✓
- CE Certified Δ (To be passed need 1 week)



FRIDGE. 2 TO 8 °C

- 2 Doors
- Volume: 1200 Liters
- MOQ: 50 PCS
- Quality: Standard ✓✓
- CE Certified ✓



Accurate temperature control system

Italy CAREL brand temperature control system, display accuracy of 0.1 °C, precise box temperature of 2 ~ 8 °C .

High-resolution temperature calibration function, proofreading in 0.1 °C increments . Intelligent control of fan strong refrigeration gas circulation .

Safe control system

Keyboard lock and password protection .

System failure alarm sound and point code display (high temperature /low temperature / sensor failure .Delayed start of self-check at start up and shutdown interval protection .

Sensor failure, digital disorder, safe and automatic running program .

Power-off memory function .

Refrigeration system

German SECOP brand high efficiency compressor .

Imported Bi-Sonic fan, low temperature resistance and high humidity resistance .

Germany EBM brand cooling fan .

Germany DANFOSS brand filter system .

American DuPont brand refrigeration refrigerant .

Humanized design

High-quality steel wire dip adjustable shelf .

Outdoor anti-condensation technology .

Large screen digital display .

Safety door lock design .

Suitable for wide voltage band of 187-242V .

Transparent vacuum tempered glass door .

Energy-saving lighting in the cabinet .


Optional functions :

1. Temperature recorder. (USB) .

2. Temperature Printer .

3. SMS Remote Alarms system .

4. Alarms for (door open / power failure / low backup battery / low voltage) .

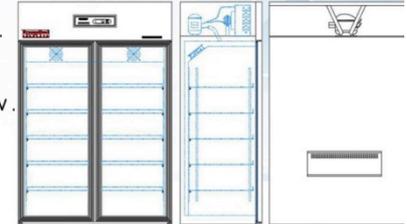

Model	Volume	Inner Temperature	Voltage	Power Consumption
YY-1200	1200 L	2~8 °C	~220V/50Hz	2.8 kWh /24h
Input Power	Electric Shock	Climate Type	Alarms Type	Optional Functions
380W	I/B	N	Sound / Light	Recorder/Printer/SMS Alarms
Refrigerant	Net Weight	Chamber	Products Dimension (D*W*H)	Package Dimension (D*W*H)
R134a	150 KG	6	1200*750*1860 mm	1355*850*1990 mm

FREEZE (-25)

- 1 Door
- Volume: 268 Liters
- MOQ: 50 pcs
- Quality: Premium ✓✓✓
- CE Certified ✓



MORLIGNE

Technical dataDoor4

(shelves/basket)Shelves

Cooling type(Forced air cooling/direct cooling)Direct cooling

Defrost(automatic/manual) Manual

RefrigerantR290

Power consumption(kWh/24h)3.0

Noise level(db)46

Ambient temperature (°C) 10~32°C

Temperature range (°C) -10~-25°C

Control SystemSensor typeNTC

Temperature controller Electronic temperature controller

DisplayDigital

PowerVoltage/Frequency220/50Hz

Power(W)280W

Electricity (A) 1.4

Dimensions

Capacity (L/cu.ft)268

Net/Gross weight (KG)98.5/115

Overall

size(Width*Depth*Height)mm673×676×1630

Inner size(Width*Depth*Height)mm

508×455×1137

Packing

size(Width*Depth*Height)mm770×770×1804

Alarm SystemHigh/low temperature√

Power off√

High and low voltage/



FREEZE (-25)

- 1 Door
- Volume: 268 Liters
- MOQ: 30 pcs
- Quality: Premium ✓✓✓
- CE Certified ✓

-25°C 低温保存箱

-25°C Deep Freezer



DW-25L300/400

◇ 应用领域

适用于医院、血站、科研院所、疾病防控、畜牧等行业机构。
用于冷冻保存血浆、试剂、疫苗、生物材料等。

◇ 产品特点

温度控制系统:

- ◇ 微电脑控制, 数码箱内温度, 箱内温度-10°C—25°C可调。
- ◇ 高低温报警控制, 可根据需要设定报警温度点。

安全控制系统:

- ◇ 两种故障报警: 高低温报警、传感器故障报警。
- ◇ 两种报警方式: 声音蜂鸣报警、灯光闪烁报警。
- ◇ 多重保护功能: 开机延时、停机间隔、键盘锁定等。

制冷系统:

- ◇ 采用名牌压缩机和名牌风扇电机, 制冷迅速。
- ◇ 加厚保温层, 超微孔发泡技术, 保温效果好。
- ◇ 无氟发泡、无氟制冷剂, 绿色环保。
- ◇ 合理优化蒸发冷凝系统设计, 制冷强劲。

人性化设计:

- ◇ 抽屉设计, 取放物品更方便。
- ◇ 安全门锁设计, 防止随意开启。
- ◇ 宽电压带设计, 适应电源环境广。
- ◇ 底脚轮设计, 移动方便轻松。
- ◇ 宽气候带设计, 适合10°C—32°C环境使用。

产品型号	有效容积(L)	箱内温度(°C)	额定电压/频率(V/Hz)	外形尺寸(mm)	内部尺寸(mm)	层数(个)	功率(W)	净重/毛重(Kg)
DW-25L300	300	-10—25	-220V/50	600×625×1875	480×449×1624	6	265	74/85
DW-25L400	400	-10—25	-220V/50	775×720×1900	645×529×1648	6	330	96/105



MORLIGNE

COMBINE (2 DOORS)

- Fridge 2 to 8 °C
- Freezer -25 °C
- MOQ: 50 PCS
- Volume: 270 Liters
- Quality: Premium ✓✓✓
- CE Certified ✓



型号	YR/FL260
输入功率	350W
冷藏室有效容积	170L
冷藏箱内温度	2°C~8°C
冷藏灌注量	R600a/52g
冷冻室有效容积	90L
冷冻箱内温度	-10°C~-26°C
冷冻灌注量	R290/130g
耗电量	5Kwh/24h
整体外形尺寸 (mm)	640*635*1870 (长*深*高)
内胆尺寸 (mm) (长*深*高)	冷藏室540*540*620 冷冻室485*420*430
箱体重量	87kg



COMBINE (2 DOORS)

- Fridge 2 to 8 °C
- Freezer -25 °C
- MOQ: 20 PCS
- Volume: 360 Litters
- Quality: Standard ✓✓
- CE Certified ✓



OXYGENE COMPRESSOR

- Volume: 5 Litters
- MOQ: 50 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓



14kg save more freight cost

0.5-5L flowrate oxygen concentrator ★

Electronic flowmeter adjustable by 0.1 interval ★



Specifications

Purity	≥ 90%
Flowrate	0.5-5L/min
Power Consumption	≤ 285W
Working Voltage	AC: 220V/110 V ± 10% 50/60 Hz ± 1
Outlet Pressure	0.04-0.08Mpa
Noise Level	≤ 45dB
Dimension	191 x 318 x 520mm (L*W*H)
Net Weight	14kg
Gross Weight	16kg
Standard Function	Over Heat Alarm, Power Failure Alarm, Timing Function, Working Hours Display.
Colour	Blue (any colour can be customized)
Optional Function	Nebulizer Function

OXYGENE COMPRESSOR

- Volume: 10 Litters
- MOQ: 50 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓



- Top tray design for accessories storage.
- Large inner space faster cooling down.
- Water&dust proof molecular sieve tank.
- The flow splitter can be divided into 5 flow.



Specifications

Model	HGS-WN-NS
Flowrate	0-10L/min
Purity	93±3%
Power Consumption	<680W
Working Voltage	AC: 220 V 50Hz / 110 V 60Hz
Outlet Pressure	0.04-0.08Mpa (pressure > 0.08 can be customized)
Noise Level	< 50dB
Dimension	365 x 400 x 650mm (L*W*H)
Net Weight	31kg
Gross Weight	33kg
Carton Size	430x 460x 720mm (L*W*H)
Standard Function	Over Heat Alarm , Power Failure Alarm ,Timing Function , Working hours Display
Optional Function	Nebulzer Function, Flow Splitter



MORLIGNE

STERILE SINGLE USE SYRINGE

- 0.5ml to 1ml
- 2 Options available:
 - Auto-disable
 - Normal version:
- MOQ: 100,000 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓



PIPETTE

- 10ul to 1000ul
- MOQ: 100,000 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓



MEDICAL BED

- 5 functions electric medical bed
- MOQ: 10 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓

Features:

- 1) Cold steel plate wholly molded surface, integrated frame treated with electrostatic spraying. Anti-aging and anti-rust
- 2) PE head and foot board integrated with bedside table*
- 3) 4 pcs longer automatic lifting railing, safe and reliable, and can be fixed upward and downward
- 4) One set of handset
- 5) Manual CPR*
- 6) Battery backup
- 7) Four wheels adapt central control system
- 8) Degree show function
- 9) Foot section correct to horizontal position
- 10) Back section decompression function, more space for patients


Dimensions:

- 1) L2220* W1040 *H460-700mm
- 2) Angle of back section: 0 - 70° (± 5°)
- 3) Angle of leg section: 0 - 30° (± 5°)
- 4) Angle of Trendelenburg and Reverse Trendelenburg: 0 - 13° (± 2°)

Accessories:

- 1) I.V. pole
- 2) Integrated bedside table*
- 3) 6 pcs mattress holder*
- 4) X-RAY ready*
- 5) Expand 150mm*

* Optional



MONITOR

- MONITOR ER (for intensive care)
- MOQ: 20 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓



SYRINGE DRIVER

- Syringe driver (5ml to 50 ml)
- MOQ: 20 PCS
- Quality: Premium ✓✓✓
- CE Certified ✓





MORLIGNÉ

THANK YOU

Tel: +86 133 75 79 87 50

e-mail: info@morlignegroup.com