

Part No: TURTDCB1M1F-3

50KHz-110GHz,16V,1.0mm Male-Female DC Block

电气特性 Electrical:


工作频率 Frequency:	50KHz-110GHz
插损 Insertion Loss:	2.5 dBMax
驻波 VSWR:	1.95Max, 1.5 typ
群延时 Group Delay	74.3ps typ
工作电压 DC Voltage:	16 VOLTS typ
耐受功率 Power Handling:	+27dBm
阻抗 Impedance:	50 OHMS

机械特性 Mechanical:

操作温度 Operation Temperature:	-45~+70°C
存储温度 Storage Temperature:	-55~+125°C
壳体 Body Material:	Golden Plated Copper
内导体 Center conductor:	Becu, Golden
接口 Connectors:	1.0mm Male to Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

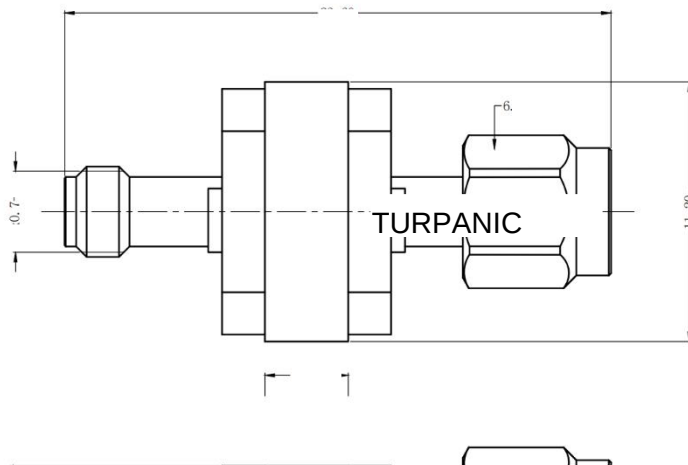

测试曲线（Test Curve）

